

SVT/Quotation/2019-20/386

Date: 11.07.2019

SUB: Quotation for Renovation of toilet on ground floor next to the meter room, below the main steeped way to the first floor under RUSA -2 Infrastructure grant at Sir Vithaldas Thackersey College of Home Science (Autonomous) SNDT Women's University, Sir Vithaldas Vidyavihar Campus, Juhu Tara Road, Santacruz (West), Mumbai.

Madam /Sir,

Sealed quotations are invited for Renovation of toilet on ground floor next to the meter room, below the main steeped way to the first floor under RUSA -2 Infrastructure grant at Sir Vithaldas Thackersey College of Home Science (Autonomous) SNDT Women's University, Sir Vithaldas Vidyavihar Campus, Juhu Tara Road, Santacruz (West), Mumbai. Interested vendors are requested to submit their quote in the format given in Annexure A on company letter head. Quotation should be submitted to The Principal, Sir Vithaldas Thackersey College of Home Science (Autonomous) SNDT Women's University, Sir Vithaldas Vidyavihar Campus, Juhu Tara Road, Santacruz (West), Mumbai on or before 19th July, 2019 (before 1.00 p.m.)

Sir Vithaldas Thackersey College of Home Science (Autonomous), SNDT Women's University, Santacruz (West), Mumbai reserves the right to reject any or all quotations without assigning any reasons thereof.


Dr. Jagmeet Madan
(Principal)

(Offer should filled on letter head)
Annexure A

To,
The Principal,
Sir Vithaldas Thackersey College of Home Science (Autonomous),
SNDT Women's University,
Juhu, Santacruz (West),
Mumbai - 400 049.

SUB: Quotation for Renovation of toilet on ground floor next to the meter room, below the main steeped way to the first floor under RUSA -2 Infrastructure grant at Sir Vithaldas Thackersey College of Home Science (Autonomous) SNDT Women's University, Sir Vithaldas Vidyavihar Campus, Juhu Tara Road, Santacruz (West), Mumbai.

Sir / Madam,

With reference to subject cited above we would like to furnish our quote with best rate possible as below :

ITEM NO.	DESCRIPTION OF ITEM	QTY	RATE	UNIT	Amount
			(in Rs.)		(in Rs.)
1	Removal of existing window & wall below cill for making door opening of the size as per instructions.				1,000/-
				Job	
2	Removal of the existing door to the toilet & door from room to outside.				1,000/-
				P/S	
3	Providing & constructing 9" thk brick work in cement mortar (1:6) to block the existing removed door opening all complete as per specifications & instructions.	25 Sqft	0	Sqft	
4	Providing & applying cement mortar plaster (1:4) in two coats from room side to new brick wall as per specifications & instructions.	25 Sqft		Sqft	
5	Providing & applying plaster in cement mortar (1:4) in single coat from toilet side to the new brick wall as per specifications & instructions.	25 Sqft		Sqft	
6	Removing of brick bat coba of raised portion of existing WC area.				500/-
				Job	
					Cont.2

-2-

7	Removal of wall & floor tiles	140 Sqft		Sqft	
8	Providing & laying brick bat coba with waterproofing laid to slope as per design & instructions	30 Cubic ft		Cu. ft	
9	Providing & constructing door size :- 2'-6" x 7'-0" comprising of 3" x 4" TW frame, 1 1/2" x 4 1/2" TW headrail, middle rail, bottom rail & stiles on either side, including 3/8" thk byson board & having 4mm thk approved make & colour bakelite sheets on either side of byson board panel with TW beading from inside etc., complete with providing & fixing necessary hardware, adhesive etc., all as per design, specifications & instructions	1 No.		Nos	
10	Do- Do as above door size :- 3'-0" x 7'-0"	1 No.		Nos	
11	Providing & laying vitrified floor tiles 3/8" thk of approved make & shade laid on 3/4" thk cement mortar (1:6) bedding with cement grouting etc., complete laid to slope as per design, specifications & instructions. Basic price of Vitrified tile Rs. 25/- per sqft	40 Sqft		Sqft	
12	Providing & fixing in position wall dado in ceramic tiles of approved make & shade with cement mortar (1:4) backing, cement grouting etc., all in line & level, complete as per design, specifications & instructions. Basic price of Ceramic tile Rs. 20/- per sqft	140 Sqft		Sqft	
13	Providing & applying three coats of oil paint of approved make & shade to remaining walls & ceiling all as per specifications & instructions.	100 Sqft		Sqft	
14	Do-Do as above oil painting to wooden surface of doors on either sides (excluding bakelite area)	80 Sqft		Sqft	
				Cont.3	

-3-


15	Providing & fixing in position 1'-0" x 1'-6" aluminium frame and adjustable glass louvered window on side of newly fixed door to toilet with the cill at 5'-5" also including kaddappa jamb lining in 2 pcs 6" wide each with an overlap of 1" all complete as per design, specifications & instructions.	1 No.		Nos	
16	Providing & fixing in position M.S frame chajjah size :- 8'-0" long x 2'-0" wide in slope including byson board fixed to the frame & 16 guage GI sheet fixed on byson board & sides of frame & inserted in the wall creating wata etc., complete all as per specifications & instructions above both the doors.	16 Sqft		Sqft	
17	Plumbing & Sanitary wares including water pipes in CPVC, drainage for waste water & soil in adequate size & PVC (prince make) including nahani trap with adequate water cill & orissa patter indian WC, water tap, bib cock in 2 nos., also including flushing tank for WC etc., complete as per specifications & instructions				35,000/-
18	Electrical work		P/S		2,500/-
19	Providing & constructing steps with ota in kota tile with brick work to enter the toilet from outside as well to enter the room from outside including kota treads of 11" & risers of 5" as per design, specifications & instructions. (Note :- Length of the steps shall be 3'-0" for each doors)		P/S		25,000/-
20	Miscellaneous		P/S		10,000/-
	TOTAL				

All the terms and conditions given in notifications are studied thoroughly and accepted fully.


Thanking you,
Yours truly,

Name of the Company
Signature of the Proprietor
Date :

Note : Please enclose 1. Self attested GST number copy ,
2. Self attested PAN number copy,
3. Declaration on the company letter head if GST is not applicable.

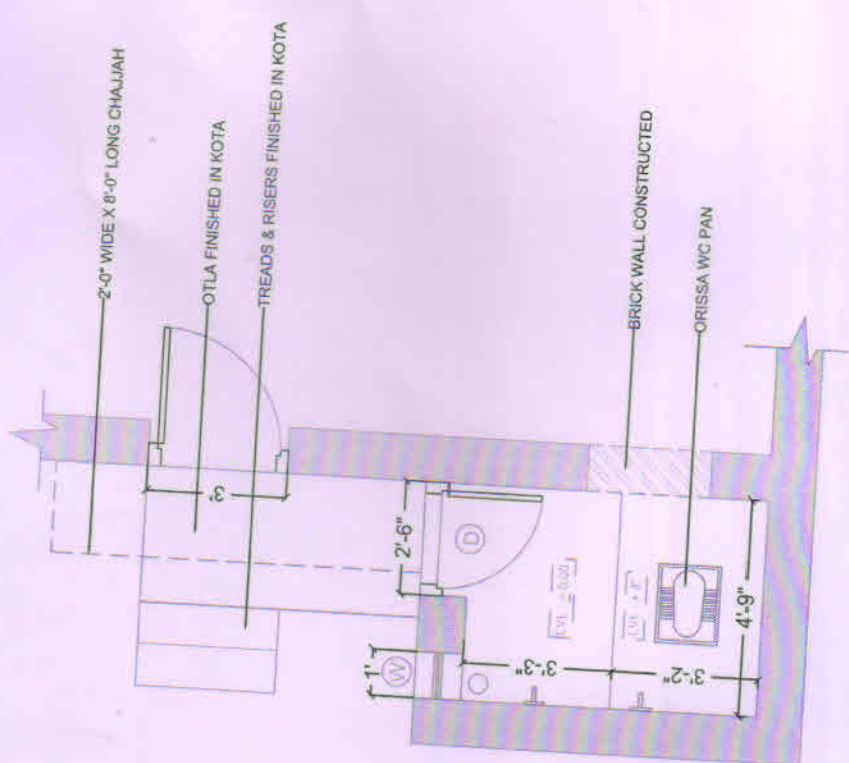

PROPOSED LAYOUT

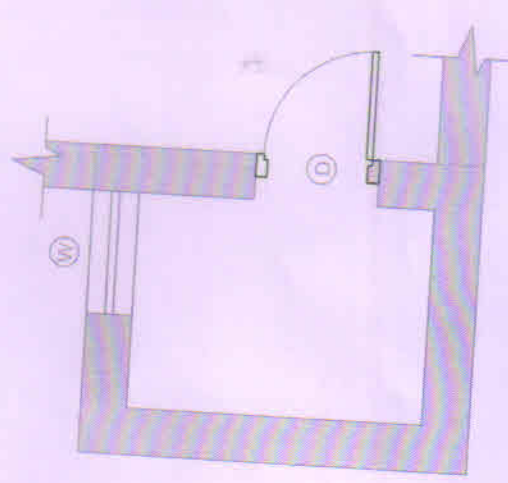

EXISTING LAYOUT

GROUND FLOOR TOILET NEAR STAIRCASE

SCALE 1' = 3/8"